

S250




Materials

Stationary - Car, Cer, Sic, SSic, TC
 Rotary - Car, Sic, SSic, TC
 Elastomer - NBR, EPDM, Vit

Working Conditions

Pressure <12 bar
 Speed <16 m/s
 Temperature up to 180°C

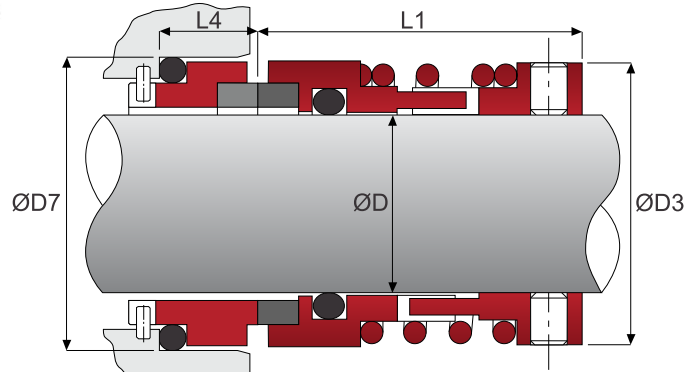

Metric		ØD3	L1	ØD7	L4
Shaft ØD	Code				
20	0200	34	41	35	13
22	0220	36	41	37	13
24	0240	38	43	39	13
25	0250	39	43	40	13
28	0280	42	45	43	13
30	0300	44	45	45	13
33	0330	47	45	48	13
35	0350	49	49	50	13
38	0380	54	53	56	13
40	0400	56	55	58	13
43	0430	59	55	61	13
45	0450	61	55	63	13
48	0480	64	55	66	13
50	0500	66	60	68	13
53	0530	69	61	71	13
55	0550	71	61	73	13
58	0580	76	63	79	16
60	0600	78	63	81	16
63	0630	81	63	84	16
65	0650	83	67	86	16
70	0700	90	68	92	16
75	0750	95	72	97	16
80	0800	100	72	105	16
85	0850	105	77	110	16