

SIT/SITD




Materials

Rotary	- Cer, SiC, TC
Stationary	- SiC, Car, TC
Elastomer	- NBR, EPDM, Viton

Working Conditions

Pressure	< 10 bar
Speed	< 15 m/s
Temperature	up to 205°C

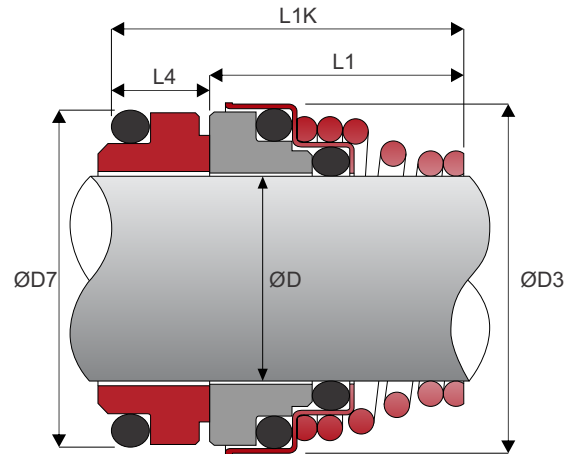

Metric		ØD3	L1	SIT			SITD		
Shaft ØD	Code			L1K	L4	ØD7	L1K	L4	ØD7
10	0100	19.5	15.0	20.5	5.5	18.1	22.0	7.0	21
11	0110	22.0	18.0	23.5	5.5	20.6	-	-	-
12	0120	23.0	18.0	23.5	5.5	20.6	25.0	7.0	23
13	0130	25.0	22.0	28.0	6.0	23.1	-	-	-
14	0140	25.0	22.0	28.0	6.0	23.1	29.0	7.0	25
15	0150	28.7	22.0	29.0	7.0	26.9	-	-	-
16	0160	28.7	23.0	30.0	7.0	26.9	30.0	7.0	27
17	0170	28.7	23.0	30.0	7.0	26.9	-	-	-
18	0180	32.7	24.0	32.0	8.0	30.9	34.0	10.0	33
19	0190	32.7	25.0	33.0	8.0	30.9	-	-	-
20	0200	32.7	25.0	33.0	8.0	30.9	35.0	10.0	35
21	0210	37.5	25.0	33.0	8.0	35.4	-	-	-
22	0220	37.5	25.0	33.0	8.0	35.4	35.0	10.0	37
23	0230	37.5	27.0	35.0	8.0	35.4	-	-	-
24	0240	37.5	27.0	35.0	8.0	35.4	37.0	10.0	39
25	0250	40.0	27.0	35.5	8.5	38.2	37.0	10.0	40
28	0280	45.5	29.0	38.0	9.0	43.3	39.0	10.0	43
29	0290	45.5	30.0	39.0	9.0	43.3	-	-	-
30	0300	45.5	30.0	39.0	9.0	43.3	40.0	10.0	45
32	0320	45.5	30.0	39.0	9.0	43.3	40.0	10.0	48
33	0330	48.0	39.0	50.5	11.5	53.5	49.0	10.0	48
35	0350	50.0	39.0	50.5	11.5	53.5	49.0	10.0	50
38	0380	56.0	39.0	50.5	11.5	60.5	52.0	13.0	56
40	0400	58.0	39.0	50.5	11.5	60.5	52.0	13.0	58