



S609


Metal Bellow Seal

Materials

Rotary - Car / Antimony Car / SiC / SSiC / TC
 Elastomer - Graphite

Working Conditions

Pressure ≤ 25 bar
 Speed ≤ 25 m/s
 Temperature from -75°C up to 425°C

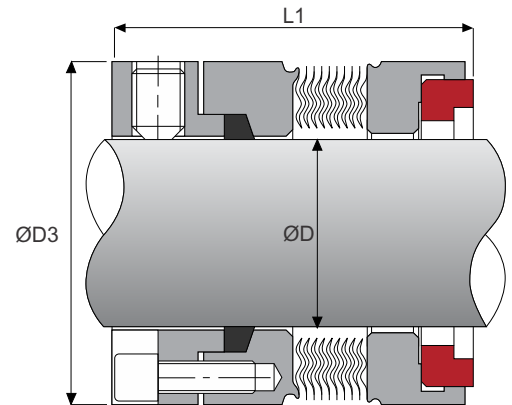

Shaft ØD		ØD3		L1	
Inches	Metric	Inches	Metric	Inches	Metric
1.000	25.4	1.625	41.28	1.535	38.98
1.125	28.6	1.750	44.45	1.562	39.67
1.250	31.8	1.875	47.63	1.593	40.46
1.375	34.9	2.000	50.80	1.593	40.46
1.500	38.1	2.125	53.98	1.593	40.46
1.625	41.3	2.250	57.15	1.593	40.46
1.750	44.5	2.375	60.33	1.625	41.28
1.875	47.6	2.500	63.50	1.625	41.28
2.000	50.8	2.625	66.68	1.656	42.06
2.125	54.0	2.750	69.85	1.656	42.06
2.250	57.2	2.875	73.03	1.719	43.66
2.375	60.3	3.000	76.20	1.719	43.66
2.500	63.5	3.250	82.55	1.750	44.45
2.625	66.7	3.375	85.73	1.781	45.24
2.750	69.9	3.500	88.90	1.781	45.24
2.875	73.0	3.687	93.65	1.875	47.63
3.000	76.2	3.812	96.82	1.875	47.63
3.125	79.4	4.000	101.60	1.875	47.63
3.250	82.6	4.243	107.78	1.875	47.63
3.375	85.7	4.250	107.95	1.875	47.63
3.500	88.9	4.375	111.13	1.875	47.63
3.625	92.1	4.500	114.30	1.875	47.63
3.750	95.3	4.625	117.48	1.875	47.63
3.875	98.4	4.750	120.65	1.875	47.63
4.000	101.6	4.875	123.83	1.875	47.63