



S680


Metal Bellow Seal

Materials

Rotary - Car / SiC / SSiC / TC
 Elastomer - NBR / EPDM / Viton / Aflas / FFKM / PTFE

Working Conditions

Pressure ≤ 15 bar
 Speed ≤ 12 m/s
 Temperature from -40°C up to 205°C

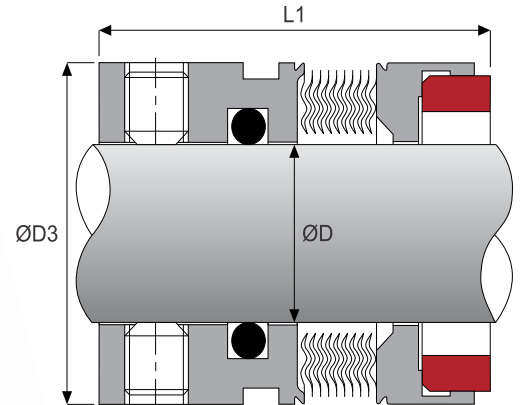

Inches		
Shaft ØD	ØD3	L1
19.1	33.3	31.8
22.2	36.8	31.8
23.8	38.1	31.8
25.4	39.7	31.8
28.6	42.8	31.8
31.7	46.0	33.3
34.9	49.2	36.5
38.1	52.4	36.5
41.3	55.5	36.5
44.5	58.7	36.5
47.6	61.9	38.1
50.8	65.1	38.1
54.0	68.2	38.1
57.2	71.4	39.7
60.3	74.6	39.7
63.5	80.9	39.7
66.7	84.1	41.3
69.9	87.3	41.3
73.0	92.1	42.8
76.2	95.3	42.8
79.4	98.4	44.5
82.1	101.6	44.5
85.7	104.8	44.5
88.9	108.0	47.6
92.1	111.1	47.6
95.3	114.3	47.6
98.4	117.5	47.6
101.6	120.7	47.6

Metric		
Shaft ØD	ØD3	L1
18	32.0	27.5
20	33.3	27.5
22	36.0	27.5
24	38.1	30.0
25	39.0	30.0
28	42.0	32.5
30	44.0	32.5
32	46.0	32.5
33	47.0	32.5
35	49.0	32.5
38	52.4	34.0
40	55.6	34.0
43	58.7	34.0
45	58.7	34.0
48	61.9	34.0
50	65.1	34.5
53	68.3	34.5
55	71.0	34.5
60	74.6	39.5
65	84.1	39.5
70	87.3	45.0
75	95.3	45.0
80	98.4	44.5
85	104.8	44.5
90	108.0	49.5
95	114.3	49.5
100	120.7	49.5