


**Materials**

Stationary  
Elastomer

- Cer / Sic / SSic / TC
- NBR / EPDM / Viton

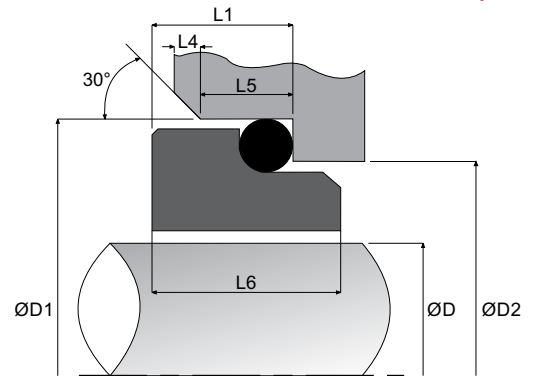

Shaft ØD	ØD1	ØD2	L4	L5	L1	L6
10	19.2	15.5	1.2	3.8	6.6	7.5
12	21.6	17.5	1.2	3.8	5.6	6.5
14	24.6	20.5	1.2	3.8	5.6	6.5
15	24.6	20.5	1.2	3.8	6.6	7.5
16	28.0	22.0	1.5	3.8	7.5	8.5
18	30.0	24.0	1.5	5.0	8.0	9.0
20	35.0	29.5	1.5	5.0	7.5	8.5
22	35.0	29.5	1.5	5.0	7.5	8.5
24	38.0	32.0	1.5	5.0	7.5	8.5
25	38.0	32.0	1.5	5.0	7.5	8.5
28	42.0	36.0	1.5	5.0	9.0	10.0
30	45.0	39.2	1.5	5.0	10.5	11.5
32	48.0	42.2	1.5	5.0	10.5	11.5
33	50.0	44.2	1.5	5.0	11.0	12.0
35	52.0	46.2	1.5	5.0	11.0	12.0
38	55.0	49.2	1.5	5.0	10.3	11.3
40	58.0	52.2	1.5	5.0	10.8	11.8
43	62.0	53.3	2.0	6.0	12.0	13.2
45	64.0	55.3	2.0	6.0	11.6	12.8
48	68.4	59.7	2.0	6.0	11.6	12.8
50	69.3	60.8	2.0	6.0	11.6	12.8
53	72.3	63.8	2.0	6.0	12.3	13.5
55	75.4	66.5	2.0	6.0	13.3	14.5
58	78.4	69.5	2.0	6.0	13.3	14.5
60	80.4	71.5	2.0	6.0	13.3	14.5
63	83.4	74.5	2.0	6.0	13.3	14.2
65	85.4	76.5	2.0	6.0	13.0	14.2
68	91.5	82.7	2.0	6.0	13.7	14.9
70	92.0	83.0	2.0	6.0	13.0	14.2
75	99.0	90.2	2.0	6.0	14.0	15.2
80	104.0	95.2	2.0	6.0	15.0	16.2
85	109.0	100.2	2.0	6.0	14.8	16.0
90	114.0	105.2	2.0	6.0	14.8	16.0
95	120.3	111.6	2.0	6.0	15.8	17.0
100	123.3	114.5	2.0	6.0	15.8	17.0