




Materials
Stationary
Elastomer

- Cer / Sic / SSic / TC / ChrStl
- NBR / EPDM / Viton

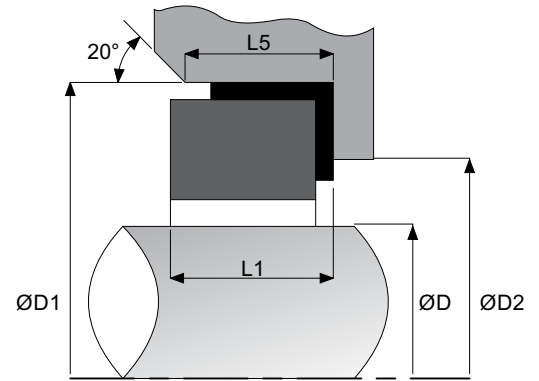

Shaft ØD		ØD1	ØD2	L1	L5
Imperial	Metric				
9.5	10	24.6	11.0	8.7	7.5
12.7	12	27.8	13.5	8.7	7.5
15.8	14	31.0	17.0	10.3	9.0
	16				
19.1	17	34.2	20.0	10.3	9.0
	18				
	19				
20.6	20	35.7	21.5	10.3	9.0
22.2	22	37.3	23.0	10.3	9.0
25.4	24	40.5	26.5	10.3	9.0
	25				
28.5	27	47.7	29.5	11.9	10.5
	28				
	29				
31.7	30	50.8	32.5	11.9	10.5
	32				
34.9	34	54.0	36.5	11.9	10.5
	35				
38.1	38	57.2	39.5	11.9	10.5
41.2	40	60.4	42.5	11.9	10.5
44.4	42	63.5	46.0	11.9	10.5
	43				
	45				
47.6	48	66.7	49.0	11.9	10.5
50.8	50	69.9	52.0	13.5	12.0
53.9	53	73.1	55.5	13.5	12.0
	54				
57.1	55	76.2	58.5	13.5	12.0
60.3	60	79.4	61.5	13.5	12.0
63.5	63	82.6	-	13.5	-
66.6	65	92.1	68.0	15.9	14.5
69.8	70	95.3	71.0	15.9	14.5
73.0	73	98.5	-	15.9	-
76.2	75	101.6	77.5	15.9	14.5
79.3	-	111.2	-	19.9	-
82.5	80	114.3	84.0	19.9	18.5
85.7	85	117.5	87.0	19.9	18.5
88.9	90	120.7	93.5	19.9	18.5
92.0	-	123.9	-	19.9	-
95.2	95	127.0	96.5	19.9	18.5
98.4	-	130.2	-	19.9	-
101.6	100	133.4	103.0	19.9	18.5